

BIS RVS Onderlegging (Vlak)

(M 29 30)


bevestiging aan Walraven RapidRail®



A



B




Voordelen en kenmerken

- vlakke onderlegging
- materiaal: roestvast staal 1.4401 (AISI 316)

Art.nr.	Type	B (mm)	s (mm)	d1 (mm)	Voor rail	VPE 1	VPE 2
6537006	A	25	2,50	Ø 6,5	30x15, 30x20, 30x30	50	500
6537008	A	25	2,50	Ø 8,5	30x15, 30x20, 30x30	50	500
6537010	A	25	2,50	Ø 10,5	30x15, 30x20, 30x30	50	500
6537012	B	28	3,00	Ø 14,0	30x15, 30x20, 30x30	50	500
6537016	B	30	3,00	Ø 17,0	30x15, 30x20, 30x30	50	500

Vanaf Ø 10,5 getest op brandveiligheid.

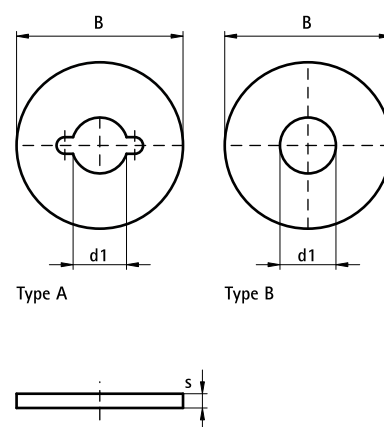

Complementair

Walraven RapidRail® RVS Montagerail
Walraven RapidRail® RVS Wandconsole