

BIS Śruby dwugwintowe z kołnierzem

(K 40 10)

mocowanie do ścian lub stropów

985




Zalety i właściwości

- materiał: stal
- ocynkowane elektrolitycznie

Nr kat.	G	L	Lh (mm)	Lm1 (mm)	PØ (mm)	Pud.	Kart.
6353635	M6	35 mm	25	8	8	100	2 000
6353650	M6	50 mm	30	6	8	100	1 000
6353680	M6	80 mm	50	6	8	100	500
6353780	M7B	80 mm	40	5	8	100	1 000
6353850	M8	50 mm	30	8	10	100	-
6353860	M8	60 mm	30	8	10	100	1 000
6353880	M8	80 mm	30	8	10	100	-
6353890	M8	90 mm	50	12	10	100	500

M7B: pitch = M7 x 1 mm.

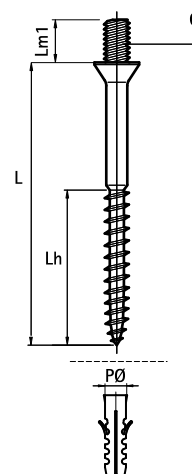

Uzupełnienie

BIS Dyble stalowe do betonu