


Walraven Trzpienie gwintowane

(K 55 05)

mocowania do szyn, płyt czołowych, kotew itp.

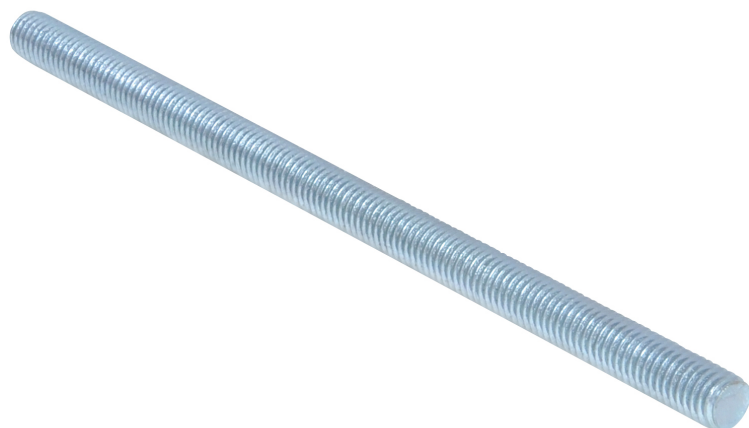


Zalety i właściwości

- zgodne z DIN 976-1
- materiał: stal, klasa wytrzymałości 4.8
- ocynkowane elektrolitycznie
- testowane pod względem bezpieczeństwa pożarowego



| Nr kat. | Typ | G | L | $A_{s,nom}$ (mm ²) | $F_{a,z}$ (N) | Pud. | Kart. |
|---------|-----------|-----|--------|-----------------------------------|------------------|------|-------|
| 6313802 | DIN 976-1 | M8 | 25 mm | 36,6 | 9 700 | 100 | 1 000 |
| 6313803 | DIN 976-1 | M8 | 30 mm | 36,6 | 9 700 | 100 | 1 000 |
| 6313804 | DIN 976-1 | M8 | 40 mm | 36,6 | 9 700 | 100 | 1 000 |
| 6313805 | DIN 976-1 | M8 | 50 mm | 36,6 | 9 700 | 100 | 1 000 |
| 6313806 | DIN 976-1 | M8 | 60 mm | 36,6 | 9 700 | 100 | 1 000 |
| 6313807 | DIN 976-1 | M8 | 70 mm | 36,6 | 9 700 | 100 | 1 000 |
| 6313808 | DIN 976-1 | M8 | 80 mm | 36,6 | 9 700 | 100 | 500 |
| 6313809 | DIN 976-1 | M8 | 90 mm | 36,6 | 9 700 | 100 | 500 |
| 6313810 | DIN 976-1 | M8 | 100 mm | 36,6 | 9 700 | 100 | 500 |
| 6313812 | DIN 976-1 | M8 | 120 mm | 36,6 | 9 700 | 50 | 250 |
| 6313815 | DIN 976-1 | M8 | 150 mm | 36,6 | 9 700 | 50 | 250 |
| 6313818 | DIN 976-1 | M8 | 180 mm | 36,6 | 9 700 | 50 | 250 |
| 6313820 | DIN 976-1 | M8 | 200 mm | 36,6 | 9 700 | 50 | 250 |
| 6323002 | DIN 976-1 | M10 | 25 mm | 58,0 | 15 400 | 50 | 500 |
| 6323004 | DIN 976-1 | M10 | 40 mm | 58,0 | 15 400 | 50 | 500 |
| 6323005 | DIN 976-1 | M10 | 50 mm | 58,0 | 15 400 | 50 | 500 |
| 6323006 | DIN 976-1 | M10 | 60 mm | 58,0 | 15 400 | 50 | 500 |
| 6323007 | DIN 976-1 | M10 | 70 mm | 58,0 | 15 400 | 50 | 500 |
| 6323008 | DIN 976-1 | M10 | 80 mm | 58,0 | 15 400 | 50 | 500 |
| 6323009 | DIN 976-1 | M10 | 90 mm | 58,0 | 15 400 | 50 | 500 |
| 6323010 | DIN 976-1 | M10 | 100 mm | 58,0 | 15 400 | 50 | 250 |
| 6323012 | DIN 976-1 | M10 | 120 mm | 58,0 | 15 400 | 50 | - |
| 6323015 | DIN 976-1 | M10 | 150 mm | - | - | 50 | 250 |
| 6323016 | DIN 976-1 | M10 | 160 mm | 58,0 | 15 400 | 50 | 250 |
| 6323018 | DIN 976-1 | M10 | 180 mm | 58,0 | 15 400 | 50 | 250 |
| 6323020 | DIN 976-1 | M10 | 200 mm | 58,0 | 15 400 | 50 | 250 |

Od M10 testowane pod względem bezpieczeństwa pożarowego.

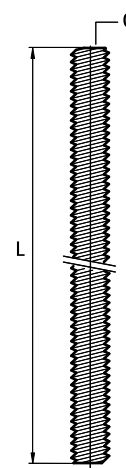

Uzupełnienie

Walraven Nakrętki przedłużane
Walraven Złączki regulacyjne do prętów