


Declaration of Performance BIS Pacifyre[®] MP Weichschott

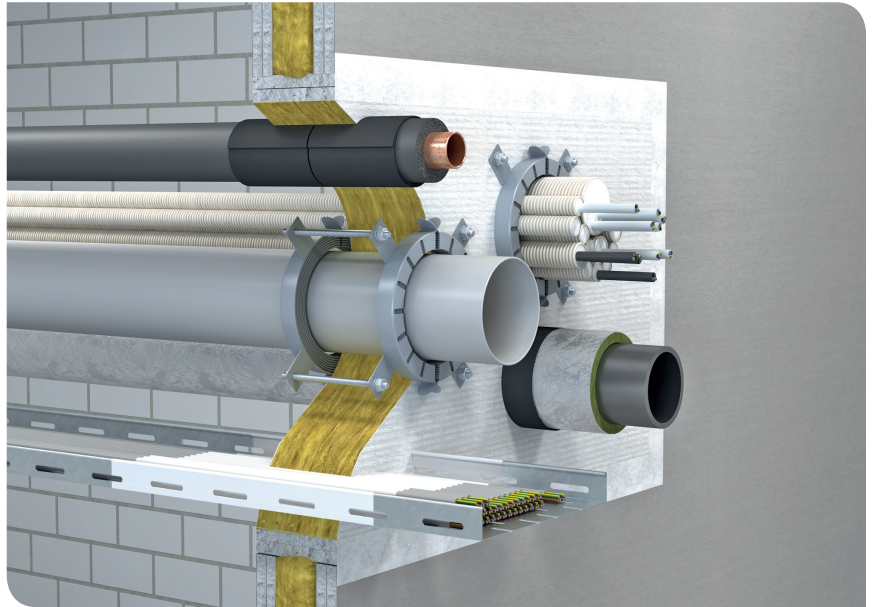

Declaration of Performance Le/DoP Nr. 504/01/1505

-ETA-15/0014-

Walraven GmbH

Postfach 125128
95425 Bayreuth (DE)
Tel. +49 (0)921 75 60 0
Fax +49 (0)921 75 60 111
info@walraven.de

Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE)
Grenoble (FR) · Banbury (GB) · Madrid (ES)
Barcelona (ES) · Mladá Boleslav (CZ)
Kraków (PL) · Kyiv (UA) · Moscow (RU)
Detroit (US) · Shanghai (CN)

ROLFKUHNGMBH

PASSIVER TECHNISCHER BRANDSCHUTZ

Declaration of Performance

According to Annex III of the Regulation (EU) Nr. 305 / 2011
for the construction product **ROKU® System MFS**

Le/DoP Nr. 504/01/1505

1. Unique identification code of the product-type:

ETA-15/0014 - ROKU® System MFS-Kombischott

2. Type, batch or serial number or any other element allowing identification of the construction product as required pursuant to Article 11 (4):

Batch number, see product packaging

3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:

ROKU® System MFS is used as a mixed penetration seal for cables and/or pipes of various materials. It shuts openings in flexible and rigid wall constructions as well as in rigid ceiling constructions and safeguards the fire-resistance of the wall or the ceiling where they are penetrated by cables and/or pipes.

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 11 (5):

**Rolf Kuhn GmbH
Jägersgrund 10
D-57339 Erndtebrück**

5. If applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):

not relevant

6. System or Systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:

System 1

7. In case of the declaration of performance concerning a construction product covered by a harmonized standard :

not relevant

8. In case of the declaration of performance concerning a construction product for which an European Technical Assessment has been issued:

The notified body MPA Braunschweig, No 0761, has performed the initial inspection of the factory and of the factory production control and performs the continuous surveillance, assessment and approval of the factory production on a regular basis according System 1 and issued the following:

Certificate of constancy of performance 0761 - CPR - 0435

ROLFKUHNGBH

PASSIVER TECHNISCHER BRANDSCHUTZ

9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Fire behavior - ROKU® MFC 100 airless - ROKU® MFC 100 tv - ROKU® Strip - ROKU® MFP - Hardrock 040 / Hardrock II - ROKU® AWM II	Class E Class E Class E Class F Class A1 Class E	ETA-15/0014
Release of dangerous substances	no	
Durability and serviceability	use category Typ Y ₂	
For exact details see ETA-15/0014		


10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

p.p. Jan Benner-Hensel, Quality Manager
(Name and function))

Erndtebrück, 10.06.2015

(place and date of issue)


.....
(signature)

ROLFKUHN GMBH

PASSIVER TECHNISCHER BRANDSCHUTZ

ROKU® System MFS



0761

Rolf Kuhn GmbH
Jägersgrund 10
D-57339 Erndtebrück

15

Le/DoP Nr. 504/01/1505

ETA-15/0014

ROKU® System MFS is used as a mixed penetration seal for cables and/or pipes of various materials. It shuts openings in flexible and rigid wall constructions as well as in rigid ceiling constructions and safeguards the fire-resistance of the wall or the ceiling where they are penetrated by cables and/or pipes.

Fire behavior	
- ROKU® MFC 100 airless	Class E
- ROKU® MFC 100 tv	Class E
- ROKU® Strip	Class E
- ROKU® MFP	Class F
- Hardrock 040 / Hardrock II	Class A1
- ROKU® AWM II	Class E
Release of dangerous substances	no
Durability and serviceability	use category Typ Y ₂
For exact details see ETA-15/0014	