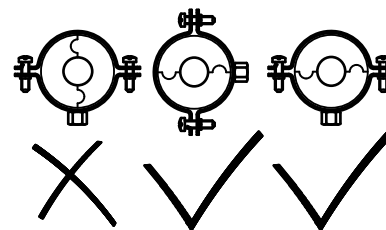


BISOFIX[®] E13 + Bifix[®] G2

8,0 - 168,3 mm

(D 03 06)


**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix[®] G2 clamp
- Bifix[®] G2 with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
 - tehnologie BIS UltraProtect[®] 1000
 - un singur sistem pentru aplicații interioare și exterioare
 - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
 - temperature range -45 °C - +105 °C

BISOFIX® E13 + Bifix® G2

8,0 - 168,3 mm

(D 03 06)

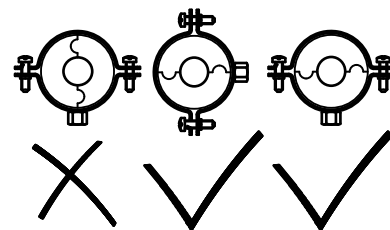

I133008064	I130000064 + 3008105	64,0	Clamp BISOFIX® E13 + Bifix® G2	350	50
I133008070	I130000070 + 3008105	70,0	Clamp BISOFIX® E13 + Bifix® G2	425	50
I133008076	I130000076 + 3008115	76,1	Clamp BISOFIX® E13 + Bifix® G2	575	25
I133008089	I130000089 + 3008130	88,9	Clamp BISOFIX® E13 + Bifix® G2	875	25
I133008102	I130000102 + 3008140	101,6	Clamp BISOFIX® E13 + Bifix® G2	1.000	25
I133008108	I130000108 + 3008140	108,0	Clamp BISOFIX® E13 + Bifix® G2	1.075	25
I133008114	I130000114 + 3008160	114,3	Clamp BISOFIX® E13 + Bifix® G2	1.250	25
I133008133	I130000133 + 3008169	133,0	Clamp BISOFIX® E13 + Bifix® G2	1.475	25
I133008140	I130000140 + 3008180	139,7	Clamp BISOFIX® E13 + Bifix® G2	1.700	5
I133008160	I130000160 + 3008200	159,0 - 160,0	Clamp BISOFIX® E13 + Bifix® G2	1.950	5
I133008168	I130000168 + 3008200	168,3	Clamp BISOFIX® E13 + Bifix® G2	2.125	5