

**BISOFIX® E13 + HD500**

8,0 - 168,3 mm

(D 03 08)


**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m<sup>3</sup>
- PIR density >80mm = 120kg/m<sup>3</sup>
- PIR density 80kg/m<sup>3</sup> => 0,024-0,026 [W/m\*K]
- PIR density 120kg/m<sup>3</sup> => 0,030-0,032 [W/m\*K]
- Protecția suprafeței:
  - tehnologie BIS UltraProtect® 1000
  - un singur sistem pentru aplicații interioare și exterioare
  - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
  - temperature range -45 °C - +105 °C

# BISOFIX® E13 + HD500

8,0 - 168,3 mm

(D 03 08)

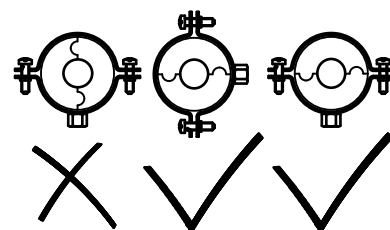

I133304064	I130000064 + 33048106	64,0	Clamp BISOFIX® E13 + HD500	350	25
I133304070	I130000070 + 33048106	70,0	Clamp BISOFIX® E13 + HD500	425	25
I133304076	I130000076 + 33048116	76,1	Clamp BISOFIX® E13 + HD500	575	25
I133304089	I130000089 + 33048133	88,9	Clamp BISOFIX® E13 + HD500	875	25
I133304102	I130000102 + 33048140	101,6	Clamp BISOFIX® E13 + HD500	1.000	25
I133304108	I130000108 + 33048140	108,0	Clamp BISOFIX® E13 + HD500	1.075	25
I133304114	I130000114 + 33048154	114,3	Clamp BISOFIX® E13 + HD500	1.250	15
I133304133	I130000133 + 33048169	133,0	Clamp BISOFIX® E13 + HD500	1.475	15
I133304140	I130000140 + 33048183	139,7	Clamp BISOFIX® E13 + HD500	1.700	5
I133304160	I130000160 + 33048202	159,0 - 160,0	Clamp BISOFIX® E13 + HD500	1.950	5
I133304168	I130000168 + 33048202	168,3	Clamp BISOFIX® E13 + HD500	2.125	5