


BISOFIX® E19 + Bifix® G2

88,9 - 168,3 mm

(D 03 18)

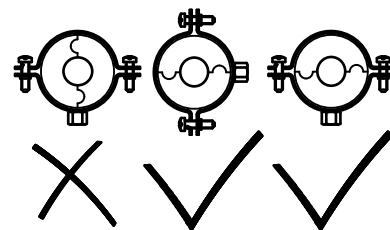

Caracteristici și beneficii

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix® G2 clamp
- Bifix® G2 with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m²*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m²*K]
- Protecția suprafeței:
 - tehnologie BIS UltraProtect® 1000
 - un singur sistem pentru aplicații interioare și exterioare
 - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
- temperature range -45 °C - +105 °C

Art.Nr.	Compus din	D (mm)	Model	F _{a,z} (N)	Amb. 1
I193008089	I190000089 + 3008140	88,9	BISOFIX® E19 + Bifix® G2 Clamp	875	25
I193008102	I190000102 + 3008160	101,6	BISOFIX® E19 + Bifix® G2 Clamp	1.000	25
I193008108	I190000108 + 3008160	108,0	BISOFIX® E19 + Bifix® G2 Clamp	1.075	25
I193008114	I190000114 + 3008169	114,3	BISOFIX® E19 + Bifix® G2 Clamp	1.250	25
I193008133	I190000133 + 3008200	133,0	BISOFIX® E19 + Bifix® G2 Clamp	1.475	5
I193008140	I190000140 + 3008200	139,7	BISOFIX® E19 + Bifix® G2 Clamp	1.700	5
I193008160	I190000160 + 3008210	159,0 - 160,0	BISOFIX® E19 + Bifix® G2 Clamp	1.950	5
I193008168	I190000168 + 3008225	168,3	BISOFIX® E19 + Bifix® G2 Clamp	2.125	5