

BISOFIX® E19 + HD500

12,0 - 219,1 mm

(D 03 20)


**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
 - tehnologie BIS UltraProtect® 1000
 - un singur sistem pentru aplicații interioare și exterioare
 - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
 - temperature range -45 °C - +105 °C

BISOFIX® E19 + HD500

12,0 - 219,1 mm

(D 03 20)

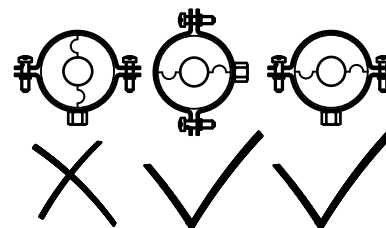

I193304076	I190000076 + 33048133	76,1	Clamp BISOFIX® E19 + HD500	575	25
I193304089	I190000089 + 33048140	88,9	Clamp BISOFIX® E19 + HD500	875	25
I193304102	I190000102 + 33048154	101,6	Clamp BISOFIX® E19 + HD500	1.000	15
I193304108	I190000108 + 33048169	108,0	Clamp BISOFIX® E19 + HD500	1.075	15
I193304114	I190000114 + 33048169	114,3	Clamp BISOFIX® E19 + HD500	1.250	15
I193304133	I190000133 + 33048202	133,0	Clamp BISOFIX® E19 + HD500	1.475	5
I193304140	I190000140 + 33048202	139,7	Clamp BISOFIX® E19 + HD500	1.700	5
I193304160	I190000160 + 33048219	159,0 - 160,0	Clamp BISOFIX® E19 + HD500	1.950	5
I193304168	I190000168 + 33048219	168,3	Clamp BISOFIX® E19 + HD500	2.125	5
I193304219	I190000219 + 33068279	219,1	Clamp BISOFIX® E19 + HD500	3.525	2