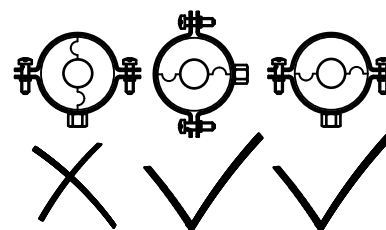


BISOFIX® E25 + Bifix® G2

(D 03 30)

12,0 - 160,0 mm


**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix® G2 clamp
- Bifix® G2 with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
- tehnologie BIS UltraProtect® 1000
- un singur sistem pentru aplicații interioare și exterioare
- rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
- temperature range -45 °C - +105 °C

BISOFIX[®] E25 + Bifix[®] G2

12,0 - 160,0 mm

(D 03 30)

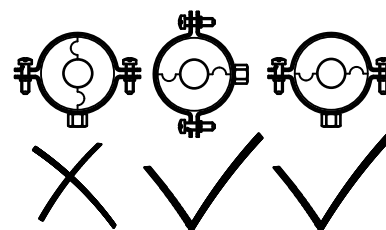

I253008076	I250000076 + 3008140	76,1	Clamp BISOFIX [®] E25 + Bifix [®] G2	575	25
I253008089	I250000089 + 3008160	88,9	Clamp BISOFIX [®] E25 + Bifix [®] G2	875	25
I253008102	I250000102 + 3008169	101,6	Clamp BISOFIX [®] E25 + Bifix [®] G2	1.000	25
I253008108	I250000108 + 3008180	108,0	Clamp BISOFIX [®] E25 + Bifix [®] G2	1.075	5
I253008114	I250000114 + 3008180	114,3	Clamp BISOFIX [®] E25 + Bifix [®] G2	1.250	5
I253008133	I250000133 + 3008200	133,0	Clamp BISOFIX [®] E25 + Bifix [®] G2	1.475	5
I253008140	I250000140 + 3008210	139,7	Clamp BISOFIX [®] E25 + Bifix [®] G2	1.700	5
I253008160	I250000160 + 3008225	159,0 - 160,0	Clamp BISOFIX [®] E25 + Bifix [®] G2	1.950	5