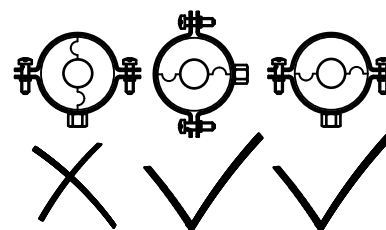


BISOFIX[®] E32 + Bifix[®] G2

12,0 - 140,0 mm

(D 03 42)


**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix[®] G2 clamp
- Bifix[®] G2 with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
 - tehnologie BIS UltraProtect[®] 1000
 - un singur sistem pentru aplicații interioare și exterioare
 - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
 - temperature range -45 °C - +105 °C

BISOFIX[®] E32 + Bifix[®] G2

12,0 - 140,0 mm

(D 03 42)

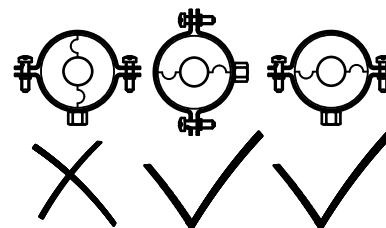

I323008089	I320000089 + 3008180	88,9	Clamp BISOFIX [®] E32 + Bifix [®] G2	875	5
I323008102	I320000102 + 3008200	102,0	Clamp BISOFIX [®] E32 + Bifix [®] G2	1.000	5
I323008108	I320000108 + 3008200	108,0	Clamp BISOFIX [®] E32 + Bifix [®] G2	1.075	5
I323008114	I320000114 + 3008200	114,0	Clamp BISOFIX [®] E32 + Bifix [®] G2	1.250	5
I323008133	I320000133 + 3008225	133,0	Clamp BISOFIX [®] E32 + Bifix [®] G2	1.475	5
I323008140	I320000140 + 3008225	140,0	Clamp BISOFIX [®] E32 + Bifix [®] G2	1.700	5