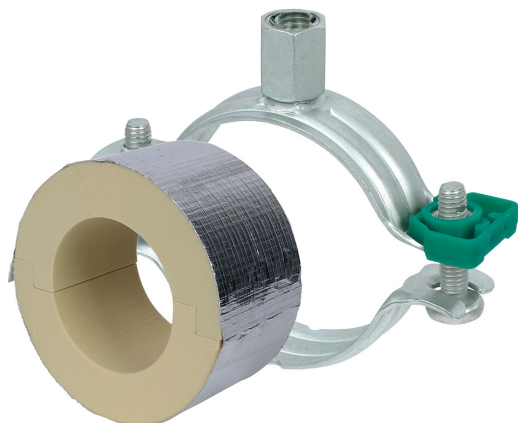


**BISOFIX<sup>®</sup> PIR30 + Bifix<sup>®</sup> G2**

(D 03 64)

12,0 - 160,0 mm



**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix<sup>®</sup> G2 clamp
- Bifix<sup>®</sup> G2 with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m<sup>3</sup>
- PIR density >80mm = 120kg/m<sup>3</sup>
- PIR density 80kg/m<sup>3</sup> => 0,024-0,026 [W/m\*K]
- PIR density 120kg/m<sup>3</sup> => 0,030-0,032 [W/m\*K]
- Protecția suprafeței:
  - tehnologie BIS UltraProtect<sup>®</sup> 1000
  - un singur sistem pentru aplicații interioare și exterioare
  - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
  - temperature range -45 °C - +105 °C

# BISOFIX<sup>®</sup> PIR30 + Bifix<sup>®</sup> G2

12,0 - 160,0 mm

(D 03 64)

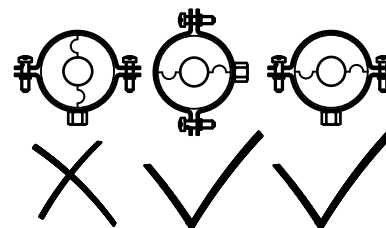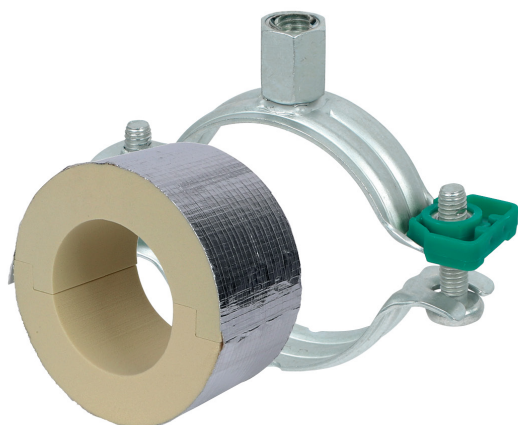

|            |                      |               |   |       |    |
|------------|----------------------|---------------|---|-------|----|
| I303008076 | I300000076 + 3008140 | 76,1          | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 460   | 25 |
| I303008089 | I300000089 + 3008160 | 88,9          | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 500   | 15 |
| I303008102 | I300000102 + 3008160 | 101,6         | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 550   | 15 |
| I303008108 | I300000108 + 3008169 | 108,0         | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 620   | 15 |
| I303008114 | I300000114 + 3008180 | 114,3         | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 1.370 | 15 |
| I303008133 | I300000133 + 3008200 | 133,0         | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 1.520 | 5  |
| I303008140 | I300000140 + 3008200 | 139,7         | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 1.570 | 5  |
| I303008160 | I300000160 + 3008225 | 159,0 - 160,0 | Clamp<br>BISOFIX <sup>®</sup> PIR30 + Bifix <sup>®</sup> G2 | 1.720 | 5  |