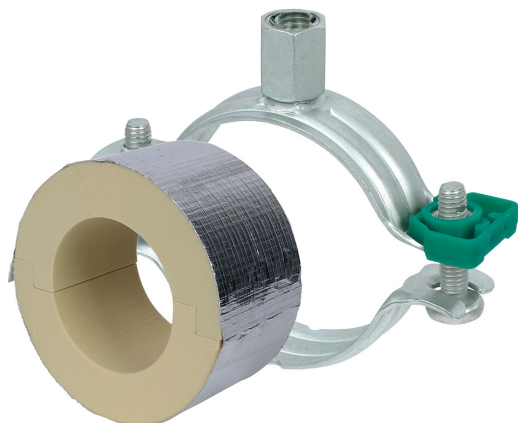


BISOFIX® PIR40 + Bifix® G2

(D 03 74)

12,0 - 139,7 mm



**Caracteristici și beneficii**

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix® G2 clamp
- Bifix® G2 with M8/M10 connection nut
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <80mm = 80kg/m³
- PIR density >80mm = 120kg/m³
- PIR density 80kg/m³ => 0,024-0,026 [W/m*K]
- PIR density 120kg/m³ => 0,030-0,032 [W/m*K]
- Protecția suprafeței:
 - tehnologie BIS UltraProtect® 1000
 - un singur sistem pentru aplicații interioare și exterioare
 - rezistență 1.000 ore la testul cu pulverizare salină cf. DIN EN ISO 9227
 - temperature range -45 °C - +105 °C

BISOFIX[®] PIR40 + Bifix[®] G2

12,0 - 139,7 mm

(D 03 74)

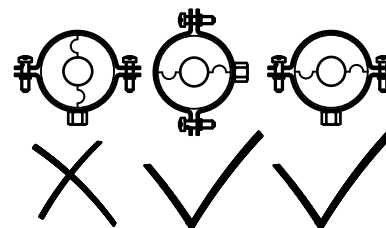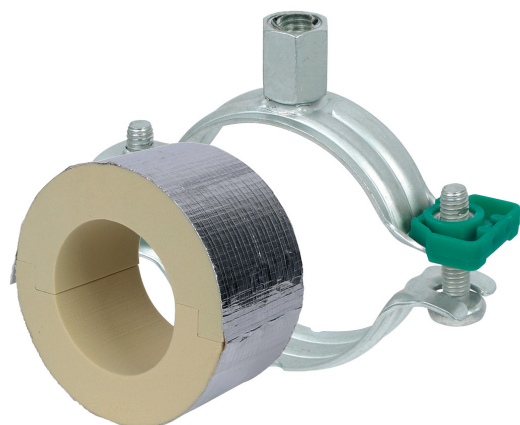

I403008076	I400000076 + 3008160	76,1	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	530	15
I403008089	I400000089 + 3008180	88,9	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	620	15
I403008102	I400000102 + 3008180	101,6	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	650	15
I403008108	I400000108 + 3008200	108,0	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	690	15
I403008114	I400000114 + 3008200	114,3	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	1.530	5
I403008133	I400000133 + 3008210	133,0	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	1.670	5
I403008140	I400000140 + 3008225	139,7	Clamp BISOFIX [®] PIR40 + Bifix [®] G2	1.730	5