


# BISOFIX® PIR50

12,0 - 406,4 mm

(D 03 80)

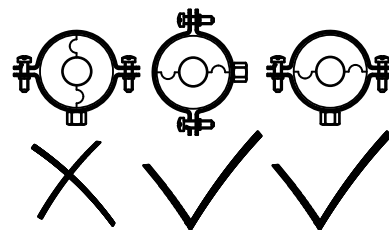

## Caracteristici și beneficii

- for combination with rigid foam insulation
- cover joints with aluminium tape
- nu conține CFC, HCFC, formaldehidă sau cadmiu
- Brandklasse B2
- PIR density <108mm = 80kg/m<sup>3</sup>
- PIR density >108mm = 120kg/m<sup>3</sup>
- PIR density 80kg/m<sup>3</sup> => 0,027 [W/m\*K]
- PIR density 120kg/m<sup>3</sup> => 0,040 [W/m\*K]
- temperature range -45 °C - +105 °C

Art.Nr.	D (mm)	L	H (mm)	s (mm)	F <sub>a,z</sub> (N)	Amb. 1
I500000012	12,0	75 mm	112,0	50,0	220	25
I500000015	15,0 - 16,0	75 mm	115,0	50,0	250	25
I500000018	17,2 - 18,0	75 mm	118,0	50,0	300	25
I500000022	21,3 - 22,0	75 mm	122,0	50,0	340	25
I500000028	26,9 - 28,0	75 mm	128,0	50,0	350	25
I500000034	33,7 - 35,0	75 mm	135,0	50,0	370	25
I500000042	42,4	75 mm	142,4	50,0	470	25
I500000048	48,3	75 mm	148,3	50,0	500	15
I500000054	54,0	75 mm	154,0	50,0	520	15
I500000057	56,0 - 57,0	75 mm	157,0	50,0	520	15
I500000060	60,3	75 mm	160,3	50,0	540	15
I500000064	64,0	75 mm	164,0	50,0	550	15
I500000070	70,0	75 mm	170,0	50,0	600	15
I500000076	76,1	75 mm	176,1	50,0	650	15
I500000089	88,9	75 mm	188,9	50,0	690	15
I500000102	101,6	100 mm	201,6	50,0	720	5
I500000108	108,0	100 mm	208,0	50,0	760	5
I500000114	114,3	100 mm	214,3	50,0	1.680	5
I500000133	133,0	100 mm	233,0	50,0	2.780	8
I500000140	139,7	100 mm	239,7	50,0	2.860	8
I500000160	159,0 - 160,0	100 mm	260,0	50,0	3.090	8
I500000168	168,3	100 mm	268,3	50,0	3.200	8
I500000219	219,1	150 mm	319,1	50,0	4.810	2
I500000273	273,1	150 mm	373,1	50,0	5.620	2
I500000324	323,9	150 mm	424,0	50,0	6.390	2
I500000406	406,4	150 mm	506,4	50,0	6.410	2

### În combinație cu

Bifix® G2 (M8/10) (BUP1000)  
Colier 2S (M8/10)  
BIS Colier de sarcină HD500 (BUP1000)

### În combinație cu

BIS Colier de sarcină HD500 (BUP1000)