


BIS Bifix[®] 412

pre vzduchotechnické potrubie Ø 63 - 400 mm

M8


(F 15 05)

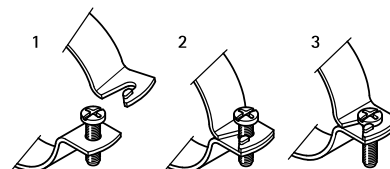

Vlastnosti a výhody

- dvojskrutková objímka
- s rýchlozatváracím systémom
- materiál: oceľ
- predgalvanizované: Sendzimirové zinkovanie

Výr. č.	D (mm)	G	B (mm)	H (mm)	h (mm)	b x s (mm)	F _{a,z} (N)	M.Bal.	Hmot./MJ (g)
4125080	80	M8	127	99	54	25 x 1,5	850	25	113.00
4125100	100	M8	147	119	64	25 x 1,5	850	25	128.00
4125125	125	M8	172	144	77	25 x 1,5	850	25	148.00
4125150	150	M8	197	169	89	25 x 1,5	850	25	172.00
4125160	160	M8	207	179	94	25 x 1,5	850	25	173.00
4125180	180	M8	227	199	104	25 x 1,5	850	25	188.00
4125200	200	M8	247	219	114	25 x 1,5	850	25	214.00
4125250	250	M8	297	269	139	25 x 1,5	850	25	252.00
4125300	300	M8	347	319	164	25 x 1,5	850	25	299.00
4125315	315	M8	361	334	171	25 x 1,5	850	25	308.00
4125355	355	M8	402	374	187	25 x 1,5	850	25	354.00
4125400	400	M8	446	419	214	25 x 1,5	850	20	391.00

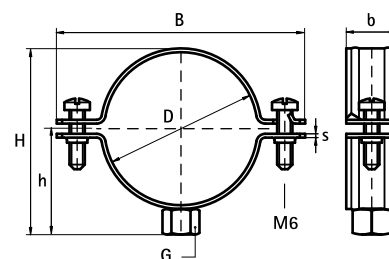

Doplňky

Walraven Montážny systém (lahký) -
Walraven RapidRail[®]
Walraven Príslušenstvo k upevneniu
Walraven Hmoždinky a kotvy