


# Walraven RapidStrut® Connectors pre-assembled Type G2 (35 Nm)

## Technical Data Sheet (TR230504)

All mentioned values are tested with rails 41 | L (41 x 41 x 1.5 mm) (according to RAL-GZ 655).  
All connectors were tightened with 35 Nm.

## Walraven RapidStrut® Rail Connector 90° G2 (BUP1000)

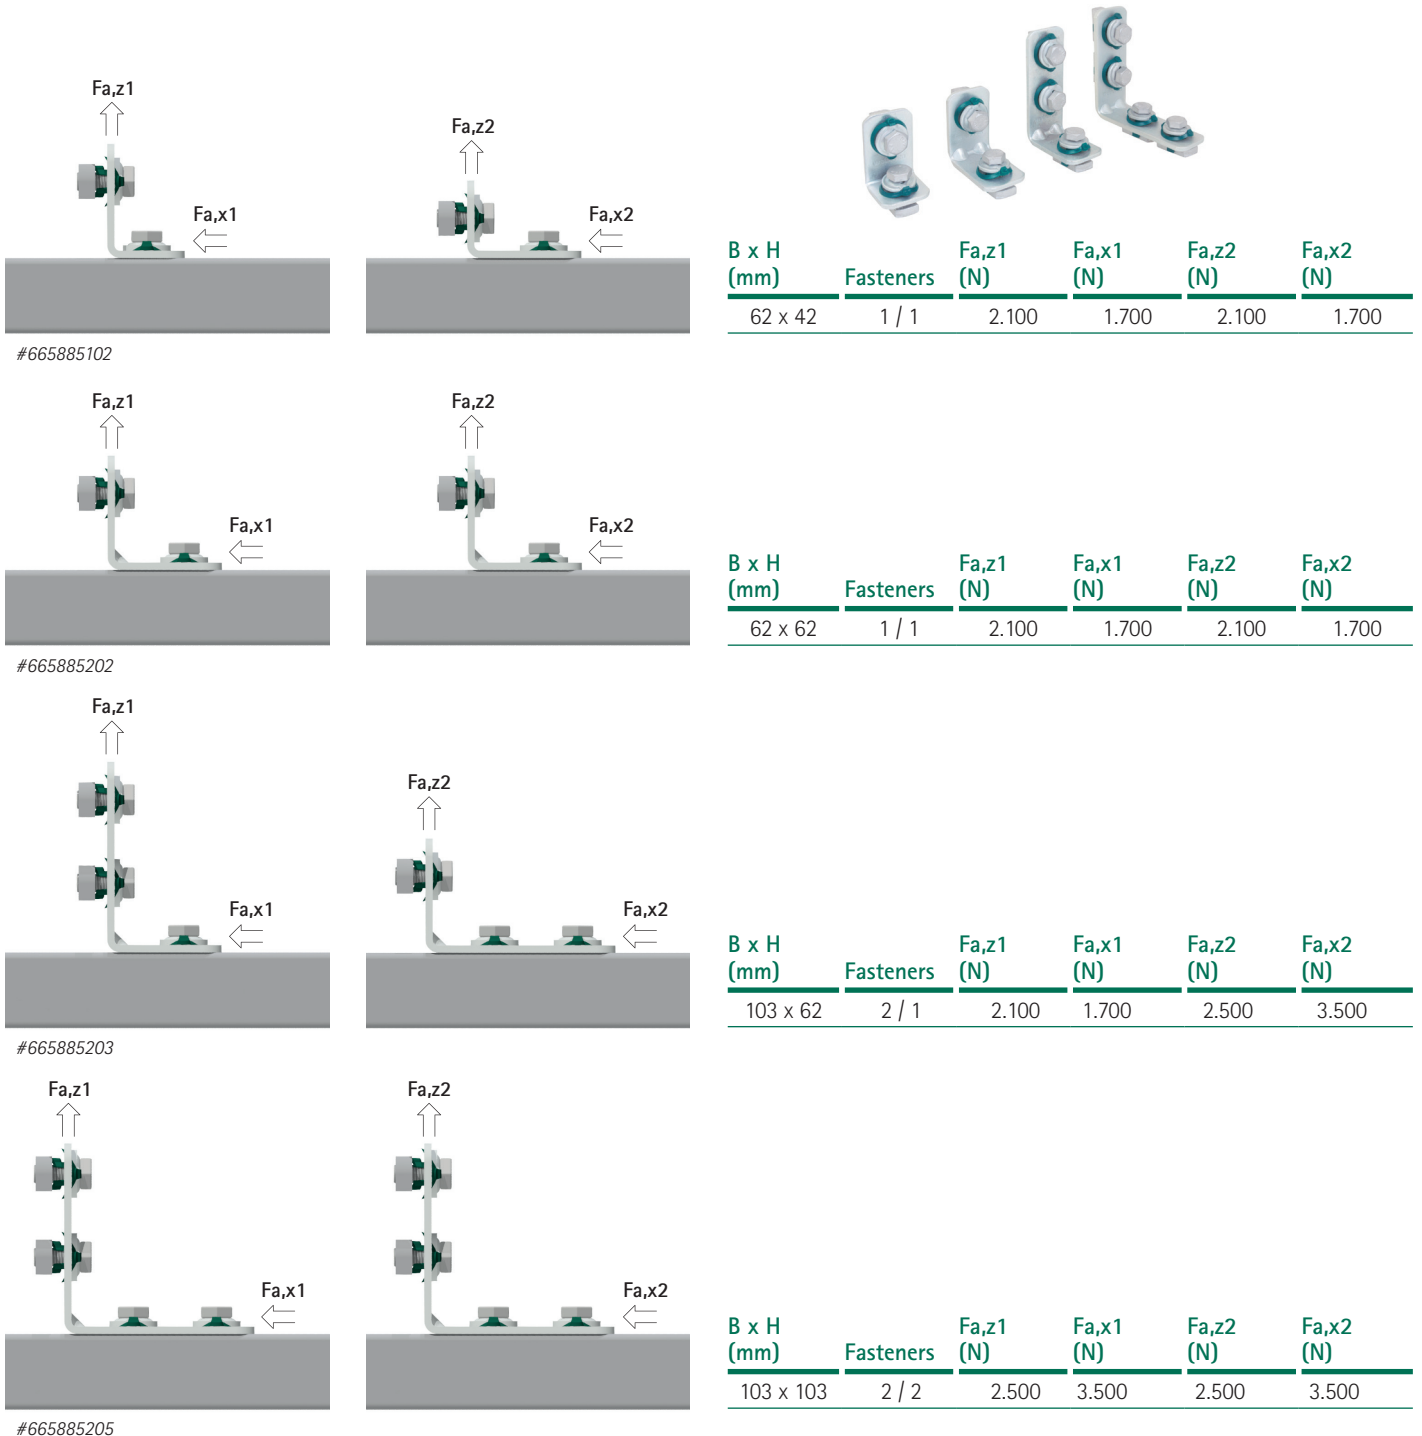

B x H (mm)	Fasteners	Fa,z1 (N)	Fa,x1 (N)	Fa,z2 (N)	Fa,x2 (N)
62 x 42	1 / 1	2.100	1.700	2.100	1.700
62 x 62	1 / 1	2.100	1.700	2.100	1.700
103 x 62	2 / 1	2.100	1.700	2.500	3.500
103 x 103	2 / 2	2.500	3.500	2.500	3.500

## Find out how we can support you

Would you like to find out more about any of the solutions described in this Technical Data Sheet?  
Or would you like to discuss how we could help you find the best possible solution for your project?  
Get in touch today!

### Singapore

South East Asia & Pacific

#### Walraven Pte. Ltd.

71 Lorong 23 Geylang #06-14

388386 Singapore (SG)

Tel. +65 6970 0605

customerservice.sg@walraven.com

### Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE) · Banbury (GB) · Malmö (SE) · Grenoble (FR) · Barcelona (ES) · Milan (IT)

Kraków (PL) · Mladá Boleslav (CZ) · Kyiv (UA) · Danville (US) · Shanghai (CN) · Dubai (AE) · Budapest (HU) · Mumbai (IN)

Singapore (SG) · Burlington (CA) · Athens (GR)

Technical Data Sheet Walraven RapidStrut® Rail Connector 90° G2 (35 Nm) (SG) – 05/2023 – PDF  
\* The technical data are non-binding and do not reflect the warranty characteristics of the products. They are subject to change. Please consult our General Terms and Conditions. Additional information is available upon request. It is the designer's responsibility to select products suitable for the intended purpose and to ensure that performance data are not exceeded. The installation instructions should always be read and followed.