

Quick and easy pipe fixing  
Now also available in South East Asia!



## starQuick®

Self-closing, UV resistant and halogen free pipe clamp




starQuick®



For indoor & outdoor use



One-part pipe clamp

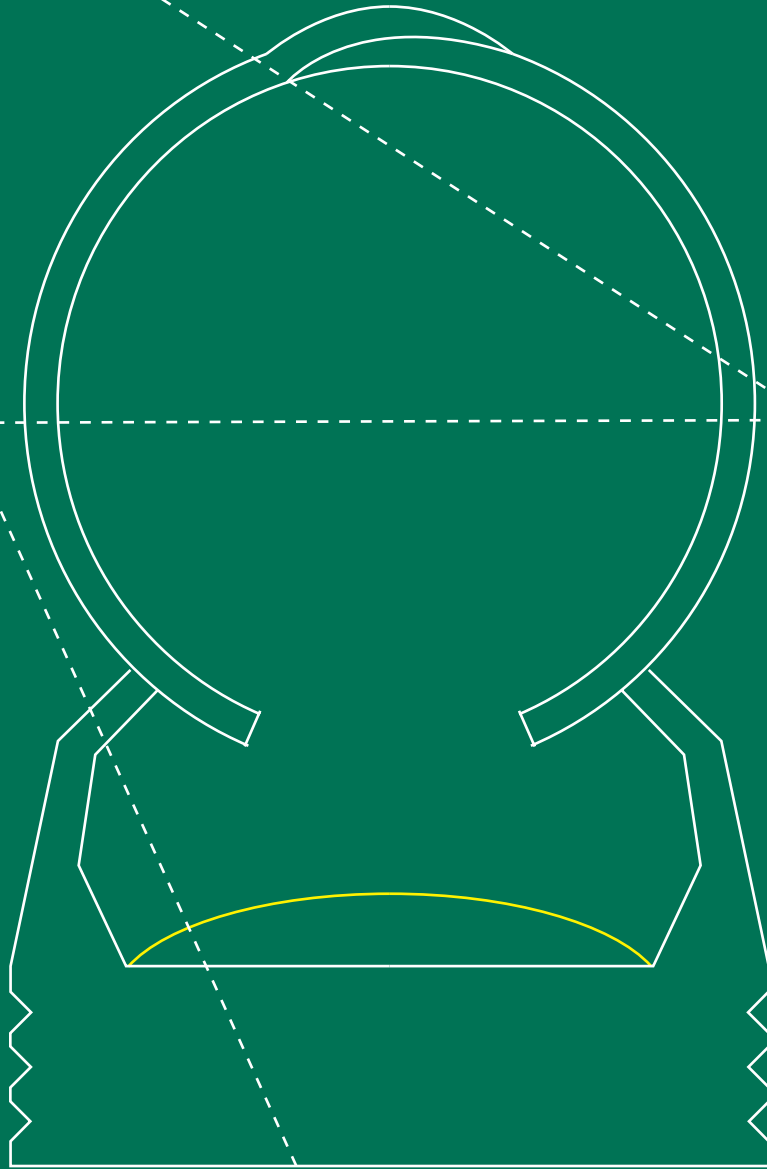

Clamp closes by applying pressure to the pipe



## starQuick® – the UV resistant and halogen free pipe clamp with a difference!

This versatile pipe clamp can be used to quickly and securely install multiple pipe runs for heating and plumbing installations. The clever self-closing feature means the clamp closes securely when the pipe is simply pushed into it. Press down again to easily unlock if required.

Suitable for lightweight copper or plastic pipework Ø 10-65 mm, this pipe clamp comes with a full range of accessories to enable easy fixing to any substrate, to rail or strut and to threaded rod. A truly versatile solution!

## Loved by plumbers on Instagram

@pbplumber Peter Booth is a fan of the starQuick clamp. He recently posted about it on his Instagram page.

Peter told us: "I couldn't believe I hadn't seen these clamps before, and that one clamp had so many features. I really like the two-step closing, so you can still move the pipe before the second click fixes it in place. And they unlock really easily too, without damaging them. I've just replaced all the clamps in my van with these."



# starQuick®

## Features and benefits

### Sizes

---

- From 10-65 mm diameter
- Special design also available for pipes 71 – 115 mm diameter (see website)

### Material and finish

---

- The clamp is made of Polyamide (PA6) which is durable, strong and impact resistant
- Available in grey, white or copper colour
- It can be made any colour you like! (In batch quantities)
- Clamp design is aesthetically pleasing

### Corrosion-free & UV resistant

---

- The starQuick® is UV stable so it will not degrade in sunlight like polypropylene clamps
- It is also recyclable and halogen free

### Suitable for specialist environments

---

- The properties of Polyamide make this clamp suitable for a range of specialist environments such as swimming pools, chemical factories, zinc factories, and outdoor use.

### Temperature resistance

---

- The starQuick® clamps are temperature resistant from -40°C to +90°C (constant) or +130°C (intermittent)

### Special installation features

---

- Easy, self-closing – simply push the pipe into the clamp
- Press down again to easily unlock
- Ridges allow multiple clamps to be attached together for close running pipes
- Range of accessories allow easy fixing direct to walls, ceilings, rail, strut, threaded rod and more!
- Aesthetically pleasing design, perfect for exposed installations



# starQuick®

## Installation guide


### Fixing of two or more pipes



1. Tacking ≤ SQ-28



2. Duo-Wall Plate ≤ SQ-20

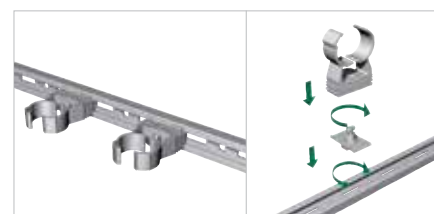


3. Fixing Rail ≤ SQ-32

### Fixing to wall or floor




### Fixing to threaded rod

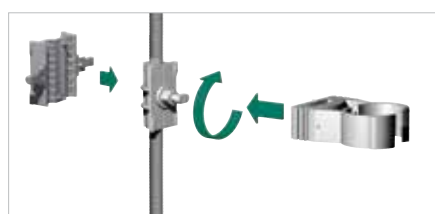

≤ SQ-51

### Fixing with a distance

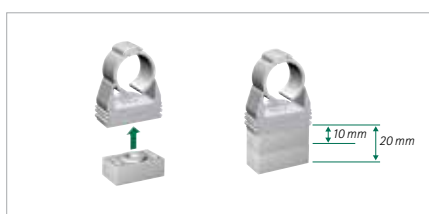

≤ SQ-36

### Fixing to metal rail



■ For BIS RapidRail®



■ Universal Rail Adaptor for BIS RapidRail® and BIS RapidStrut® ≤ SQ-51

*A truly versatile  
fixing solution!*

# starQuick®

## Clamps



Grey

Part No.	Type	D (mm)	D (")	D (DN)	Fa,z (N)	Fb,z (N)	Box qty (pc)	Outer box qty (pc)
0854010	SQ-10	10 - 12	1/8	6	170	500	100	1200
0854012	SQ-12	12 - 14	1/4	8	180	550	100	1200
0854015	SQ-15	14 - 16	-	-	200	600	100	1200
0854018	SQ-17	16 - 20	3/8	10	230	700	100	800
0854022	SQ-20	20 - 23	1/2	15	270	800	50	600
0854028	SQ-25	24 - 28	3/4	20	280	850	50	600
0854031	SQ-28	28 - 32	-	-	300	900	50	400
0854035	SQ-32	32 - 35	1	25	330	1000	50	400
0854038	SQ-36	35 - 40	-	-	370	1100	25	300
0854042	SQ-40	40 - 44	1 1/4	32	400	1200	25	200
0854050	SQ-47	44 - 50	-	-	430	1300	25	200
0854054	SQ-51	48 - 55	1 1/2	40	470	1400	15	180
0854063	SQ-59	59 - 65	2	50	500	1500	15	180



White

Part No.	Type	D (mm)	D (")	D (DN)	Fa,z (N)	Fb,z (N)	Box qty (pc)	Outer box qty (pc)
0855010	SQ-10	10 - 12	1/8	6	170	500	100	1200
0855012	SQ-12	12 - 14	1/4	8	180	550	100	1200
0855015	SQ-15	14 - 16	-	-	200	600	100	1200
0855018	SQ-17	16 - 20	3/8	10	230	700	100	800
0855022	SQ-20	20 - 23	1/2	15	270	800	50	600
0855028	SQ-25	24 - 28	3/4	20	280	850	50	600
0855031	SQ-28	28 - 32	-	-	300	900	50	400
0855035	SQ-32	32 - 35	1	25	330	1000	50	400
0855038	SQ-36	35 - 40	-	-	370	1100	25	300
0855042	SQ-40	40 - 44	1 1/4	32	400	1200	25	200
0855050	SQ-47	44 - 50	-	-	430	1300	25	200
0855054	SQ-51	48 - 55	1 1/2	40	470	1400	15	180
0855063	SQ-59	59 - 65	2	50	500	1500	15	180



Copper

Part No.	Type	D (mm)	D (")	D (DN)	Fa,z (N)	Fb,z (N)	Box qty (pc)	Outer box qty (pc)
0855812	SQ-12	12 - 14	1/4	8	180	550	100	1200
0855815	SQ-15	14 - 16	-	-	200	600	100	1200
0855818	SQ-17	16 - 20	3/8	10	230	700	100	800
0855822	SQ-20	20 - 23	1/2	15	270	800	50	600
0855828	SQ-25	24 - 28	3/4	20	280	850	50	600
0855831	SQ-28	28 - 32	-	-	300	900	50	400

Fa = maximum allowed load. Fb = breaking load.




# starQuick®

## Accessories

	Part No.	Description	Dimension	Box qty (pc)	Outer box qty (pc)
A	0854000	Duo-Wall Plate (grey)	50 mm	100	1200
	0855000	Duo-Wall Plate (white)	50 mm	100	1200
B	0854300	Duo-Wall Plate (grey)*	50 mm	50	600
C	0854356	Threaded Rod Adaptor	M6	100	1200
	0854358	Threaded Rod Adaptor	M8	100	1200
D	0854510	Distance Block	10 mm	25	250
E	0854301	Hammer-in Screw	Ø 6 x 40 mm	25	250
F	0854316	Rail	150 mm	50	400
	0854325	Rail	1 m	25	-
G	0854313	Rail Adaptor	starQuick® Rail	20	200
H	0854006	Fixing Nut (grey)	M6	100	1000
	0855006	Fixing Nut (white)	M6	100	1000
	0854308	Fixing Nut (grey)	M8	100	1000
I	6101063	Push Plug	M6	50	500
J	0854338	Hammerfix M8	WMO, 1, 15, 2, 30, 35	50	600
K	0854332	Universal Rail Adaptor	WMO, 1, 15, 2, 30, 35 + Strut	50	600

\*With hammer-in screw

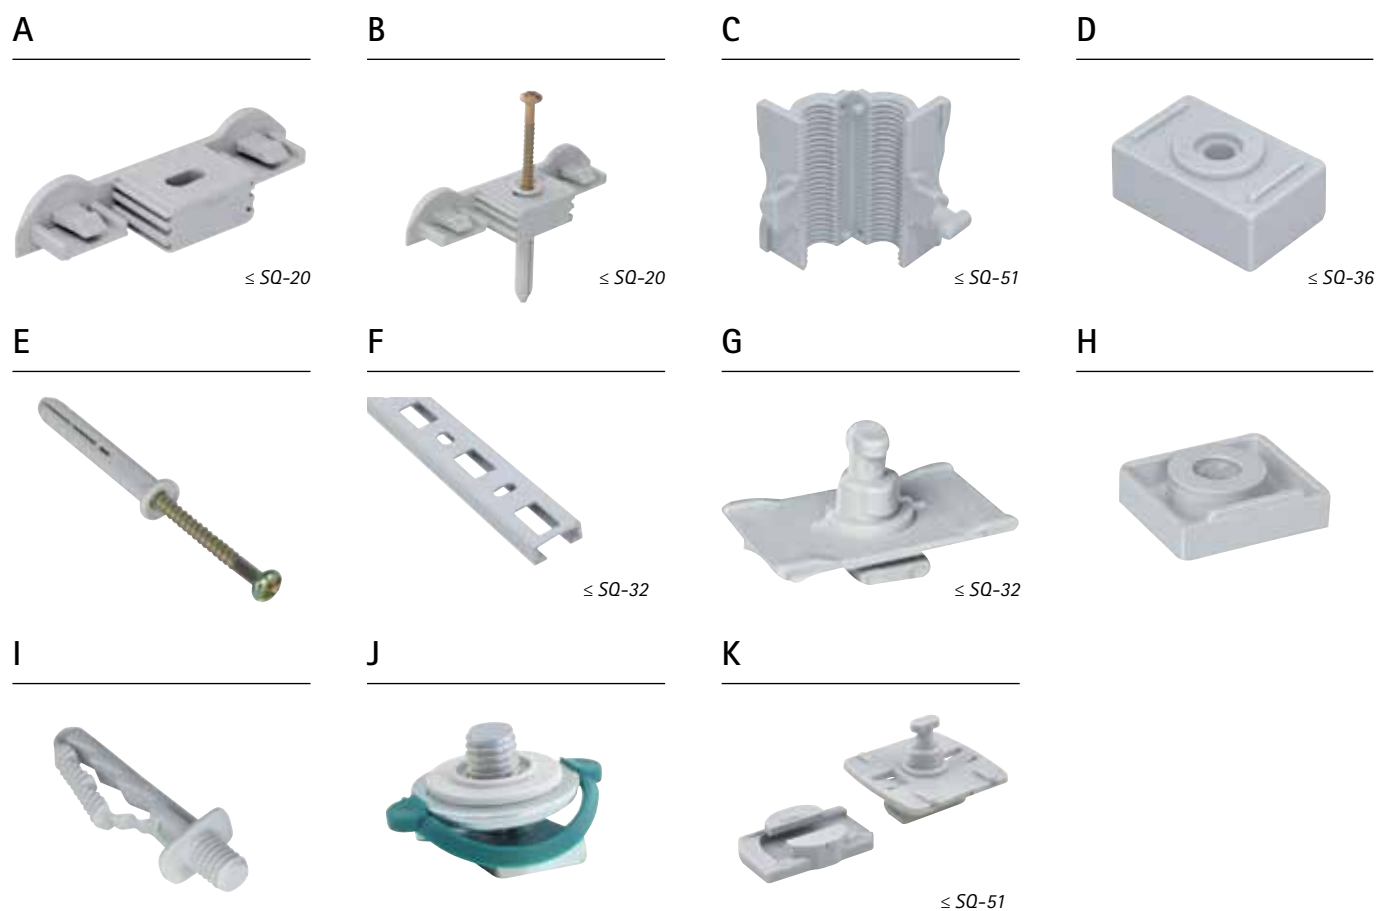

## Find out how we can support you

Would you like to find out more about any of the solutions described in this brochure?

Or would you like to discuss how we could help you find the best possible solution for your project? Get in touch today!

### Singapore

South East Asia & Pacific

---

#### Walraven Pte. Ltd.

71 Lorong 23 Geylang #06-14

388386 Singapore (SG)

[customerservice.sg@walraven.com](mailto:customerservice.sg@walraven.com)