

# WPF Plasterboard Fixings


(L 07 22)

A classic hammer-in fixing for plasterboard



## Features and Benefits

- quick and easy to install
- central thread guide provides optimum screw positioning
- does not require drilling
- sharp tip allows precise installation
- for use with  $\varnothing$  3.5-5.0 mm wood or chipboard screws
- Application:
  - interior decorations
  - pictures
- Application:
  - lamps
  - electrical fittings
- material: steel
- zinc plated
- substrate type:
  - plasterboard

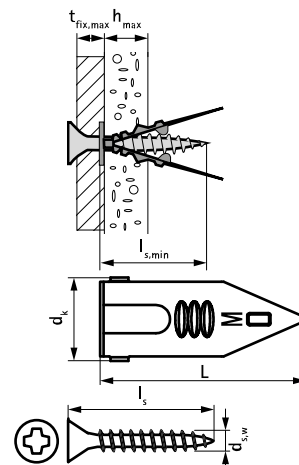

Part No.	Code	Model	L	d <sub>s,w</sub>	l <sub>s</sub>	l <sub>s,min</sub>	h <sub>max</sub>	t <sub>fix,max</sub>	Drive	Rec. Tension Load Plasterboard (h=12.5mm)	Pack 1	Pack 2
				(mm)	(mm)	(mm)	(mm)	(mm)		(kN)		
6110063	WPF 12x30	Screw excluded	30 mm	3.5 - 5.0	-	27	12.5	-	-	0.102*	200	4,800
6110092	WPF 12x30	Screw excluded	30 mm	3.5 - 5.0	-	27	12.5	-	-	0.102*	3,000	-
6110234	WPF 12x30/4x30	Screw included	30 mm	4.0	30	27	12.5	3	PZ2	0.102*	25	3,750
6110263	WPF 12x30/4x30	Screw included	30 mm	4.0	30	27	12.5	3	PZ2	0.102*	200	4,800
6110334	WPF 12x30/4x50	Screw included	30 mm	4.0	50	27	12.5	23	PZ2	0.102*	25	3,750

\* Recommended loads are for tension, have been reached using a 4.0 mm diameter wood screw and include a safety factor of 2.