


# BIS RapidStrut® Support System

## Technical Data

### Base Plates

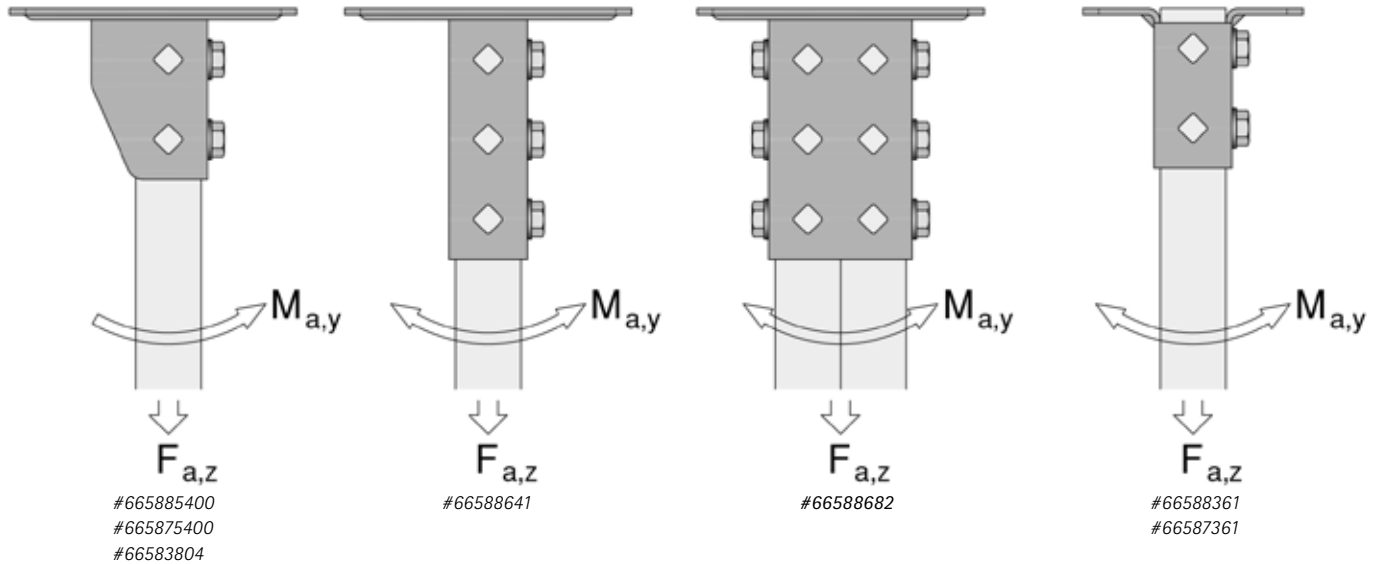

### Product details

Part No.	Fa,z1 (N)* (on Slide Nuts at open side of rail)	Fa,z2 (N)** (bolted through backside of rail)	Ma,y (Nm)	
665885400	3,636	5,151	485	
665875400	3,636	5,151	485	Stainless Steel
66583804	3,636	5,151	485	
66588641	4,242	5,303	258	
66588682	7,273	10,303	606	
66588361	3,636	3,636	164	
66587361	3,636	3,636	164	Stainless Steel

All values tested with Rails 41x41x2.5mm.

\* Slide Nuts 651868010 (M10) and Bolts DIN933 M10x25mm, tightened with 40Nm. On open side of rails.

\*\* Slide Nuts 651868010 (M10) and Bolts DIN933 M10x25mm, tightened with 40Nm.

Bolted through backside hole pattern of rails; (66588682 with Bolts DIN933 M10x110mm & Hex. Nut M10).



UK +44 (0)1295 75 34 28  
DE +49 (0)921 75 60 0  
NL +31 (0)297 23 30 00  
BE +32 (0)16 82 20 40  
FR +33 (0)4 76 04 10 70

ES +34 93 721 33 75  
PL +48 12 684 00 95  
CZ/SK +420 326 724 009  
HU (+36 1) 920 2458  
RU +7 (495) 664 35 08

UA +380 44 351 27 47  
US +1 800 610 5056  
DK +45 46 37 05 10  
SE +46 (0)40 36 54 20  
NO +45 46 37 05 10

CN +86 21 5176 0268  
SG +65 9146 8260  
Other countries  
+31 (0)297 23 30 00