


# BIS KSB1 Clamp

for metal pipes 13 - 63 mm

M8 - M8/10

(A 05 108)

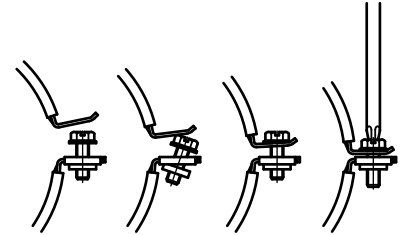


## Features and Benefits

- single screw clamp
- with quick locking system, type KSB
- clamp easy to close with one hand
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according to DIN 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)



1530-005-15

| Part No. | D<br>(mm) | D<br>(") | DN | G  | B<br>(mm) | H<br>(mm) | h<br>(mm) | b x s<br>(mm) | F <sub>a,z</sub><br>(N) | Pack 1 |
|----------|-----------|----------|----|----|-----------|-----------|-----------|---------------|-------------------------|--------|
| 3363014  | 13 - 14   | 1/4      | 8  | M8 | 46        | 38        | 23        | 20 x 1.00     | 350                     | 100    |
| 3363018  | 15 - 18   | 3/8      | 10 | M8 | 46        | 38        | 23        | 20 x 1.00     | 350                     | 100    |
| 3363023  | 20 - 23   | 1/2      | 15 | M8 | 51        | 43        | 25        | 20 x 1.00     | 350                     | 100    |
| 3363028  | 25 - 28   | 3/4      | 20 | M8 | 57        | 48        | 28        | 20 x 1.00     | 450                     | 100    |
| 3363035  | 32 - 35   | 1        | 25 | M8 | 63        | 55        | 31        | 20 x 1.00     | 450                     | 100    |
| 3363043  | 40 - 43   | 1 1/4    | 32 | M8 | 72        | 63        | 35        | 20 x 1.25     | 600                     | 100    |
| 3363051  | 48 - 51   | 1 1/2    | 40 | M8 | 80        | 71        | 39        | 20 x 1.25     | 600                     | 50     |
| 3363054  | 53 - 56   | -        | -  | M8 | 85        | 76        | 42        | 20 x 1.25     | 600                     | 50     |
| 3363062  | 58 - 63   | 2        | 50 | M8 | 91        | 82        | 45        | 20 x 1.25     | 600                     | 50     |

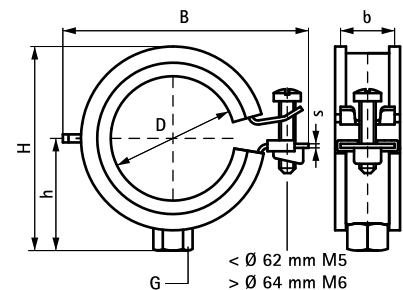

## Complementary

Walraven RapidRail® Fixing System  
Walraven Fixing Accessories  
Walraven Fastenings

## Alternative

BISMAT® 2000