


Walraven Pacifyre® FPC Fire Collar


(U 04 02)

for fire resistant sealing of plastic and multi-layer pipes 50 - 160 mm

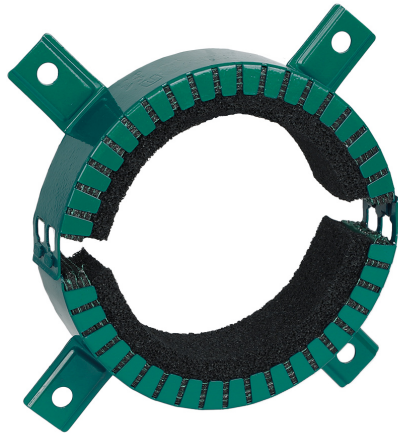


Features and Benefits

- for application in flexible walls, rigid walls and rigid floors
- suitable for combustible pipes with intended use as rainwater, sewage, gas, drinking water and heating or cooling
- for various combustible pipe materials such as PP-H, PVC and PE
- suited for certain branded pipes
- easy to install due to the connection hooks
- possible to mount 1 half and connect other half later
- collar stays in place by itself in vertical situations because of Foam layer
- with a fire resistance up to EI 120 U/U
- built-in sound insulation
- tested according to EN 1366-3
- European approval: ETA-22/0341



| Part No. | D (mm) | d (mm) | Model | B (mm) | H (mm) | Pack 1 |
|------------|-----------|-----------|---------------|-----------|-----------|--------|
| 2122000050 | 50 | 58 | 2 fixing tabs | 148.5 | 30 | 1 |
| 2122000063 | 63 | 71 | 4 fixing tabs | 129.1 | 30 | 1 |
| 2122000075 | 75 | 83 | 4 fixing tabs | 146.8 | 40 | 1 |
| 2122000090 | 90 | 98 | 4 fixing tabs | 156.8 | 40 | 1 |
| 2122000110 | 110 | 118 | 4 fixing tabs | 175.5 | 40 | 1 |
| 2122000125 | 125 | 133 | 4 fixing tabs | 169.1 | 60 | 1 |
| 2122000140 | 140 | 148 | 6 fixing tabs | 259.0 | 60 | 1 |
| 2122000160 | 160 | 168 | 6 fixing tabs | 284.0 | 60 | 1 |

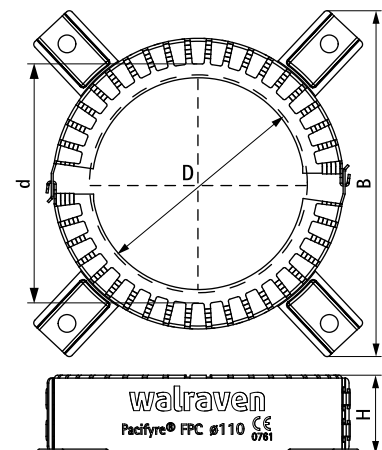

Complementary

- Pacifyre® A Acrylic Fire Sealant
- Pacifyre® FPM
- Pacifyre® ID-Card