

BIS Strut U-Connector linear (BUP1000)


(H 28 103)



Features and benefits

- U-shaped for extra stability
- longitudinal connector for all Strut rails
- for strong connections and in combination with Double Strut rails it is advised to use linear connectors on both sides of the rail
- the hole pattern is adapted to the hole pattern of Strut rails to use throughbolts
- material: steel 1.0242 (S250GD) + ZM310 MAC
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	L	B	H	s	d1	S	k	For Rail	Pack 1
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
66588121	175 mm	50	21.5	4.0	Ø 12.2	42	45	Strut 41x21 + 41x21D	20
66588141	175 mm	50	41.5	4.0	Ø 12.2	42	45	Strut 41x41 + 41x41D + 41x62 + 41x62D + 41x82	10

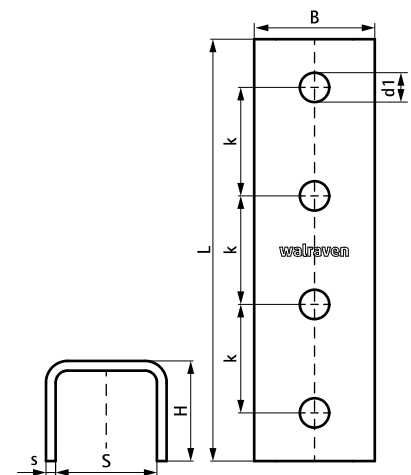

Complementary

- Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)
- Walraven RapidStrut® Fixing Rail (BUP1000)
- Walraven Strut Slide Nut (BUP1000)

Complementary

- Walraven RapidStrut® Slide Nut with Plastic Tabs (BUP1000)
- BIS Washer (Flat) (BUP1000)

Alternative

- BIS RapidStrut® Rail Connector - U-shaped G2 (BUP1000)