


BISOFIX[®] E32 + 2S

for insulated pipes 12.0 - 140.0 mm

(D 03 40)

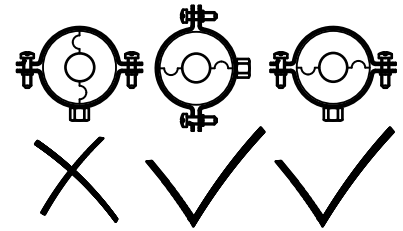

Features and Benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with 2S clamp
- 2S clamp with M8/M10 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D >80mm = 120kg/m³
- clamp: zinc plated
- temperature range -45 °C - +105 °C
- PIR density for D <80mm = 80kg/m³

Part No.	Consists Of	D (mm)	Model	F _{a,z} (N)	Pack 1
I323303012	I320000012 + 33035081	12.0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303015	I320000015 + 33035081	15.0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303018	I320000018 + 33035087	17.2 - 18.0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303022	I320000022 + 33035095	21.3 - 22.0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303028	I320000028 + 33035103	27.0 - 28.0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303035	I320000035 + 33035103	33.7 - 35.0	BISOFIX [®] E32 + 2S Clamp	100	50
I323303042	I320000042 + 33035112	42.4	BISOFIX [®] E32 + 2S Clamp	150	25
I323303048	I320000048 + 33035118	48.3	BISOFIX [®] E32 + 2S Clamp	225	25
I323303054	I320000054 + 33035127	54.0	BISOFIX [®] E32 + 2S Clamp	225	25
I323303060	I320000060 + 33035127	60.3	BISOFIX [®] E32 + 2S Clamp	350	25
I323303064	I320000064 + 33035153	64.0	BISOFIX [®] E32 + 2S Clamp	350	15
I323303070	I320000070 + 33035153	70.0	BISOFIX [®] E32 + 2S Clamp	425	15
I323303076	I320000076 + 33035162	76.1	BISOFIX [®] E32 + 2S Clamp	575	15
I323303089	I320000089 + 33035183	88.9	BISOFIX [®] E32 + 2S Clamp	875	5
I323303102	I320000102 + 33035194	102.0	BISOFIX [®] E32 + 2S Clamp	1,000	5
I323303108	I320000108 + 33035194	108.0	BISOFIX [®] E32 + 2S Clamp	1,075	5
I323303114	I320000114 + 33035205	114.0	BISOFIX [®] E32 + 2S Clamp	1,250	5
I323303133	I320000133 + 33035225	133.0	BISOFIX [®] E32 + 2S Clamp	1,475	5
I323303140	I320000140 + 33035225	140.0	BISOFIX [®] E32 + 2S Clamp	1,700	5