


# BIS Cu-FiX Fixing Point for Copper Pipe

(E 05 65)

for copper pipes 15 - 54 mm

M10

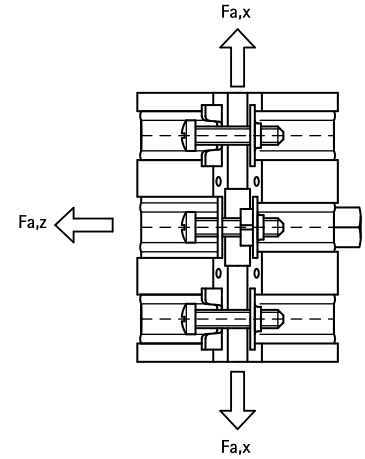

## Features and benefits

- to make noise insulating fixpoint for a copper pipe
- material: steel
- zinc plated
- temperature resistance up to +120 °C
- noise insulating lining, EPDM rubber, reddish brown
- sound insulating lining according DIN 4109
- consists of:
  - 2 Clamps BISMAT® 2000 (fixing)
  - 1 Clamp 2S (guiding)
- see also: benefits and features BISMAT® 2000 and BIS Bifix® 1301

| Part No. | D<br>(mm) | G   | B<br>(mm) | H<br>(mm) | h<br>(mm) | F <sub>a,z</sub><br>(N) | F <sub>a,x</sub><br>(N) | Pack 1 |
|----------|-----------|-----|-----------|-----------|-----------|-------------------------|-------------------------|--------|
| 3368015  | 15        | M10 | 55        | 34        | 21        | 1,110                   | 60                      | 10     |
| 3368018  | 18        | M10 | 58        | 37        | 22        | 1,110                   | 140                     | 10     |
| 3368022  | 22        | M10 | 63        | 43        | 25        | 1,110                   | 160                     | 10     |
| 3368028  | 28        | M10 | 68        | 47        | 27        | 1,110                   | 230                     | 10     |
| 3368035  | 35        | M10 | 75        | 55        | 31        | 1,110                   | 340                     | 10     |
| 3368042  | 42        | M10 | 83        | 62        | 35        | 1,240                   | 380                     | 10     |
| 3368054  | 54        | M10 | 92        | 71        | 39        | 1,240                   | 500                     | 10     |

