


# BISMAT® 2000

za metalne cijevi 11 - 63 mm

M8 - M8/10

(A 05 16)



## Prednosti i osobine

- zglobna obujmica
- sa BISMAT® brzim zatvaranjem
- materijal: čelik
- elektrizom cinkovan
- zvučno izolacioni uložak od EPDM-gume, crne boje
- gumeni uložak postojan na starenje
- zvučno izolacione osobine po DIN-u 4109
- noise reduction according to ISO 3822-1 up to 23 dB(A)
- testirano na vatrootpornost, test raport po upitu




Art.br.	D (mm)	D (°)	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F <sub>a,z</sub> (N)	RAL	KK
3413014	11 - 14	¼	8	M8	48	32	20	20 x 1,00	M6	600	-	50 *
3413018	15 - 18	¾	10	M8	48	36	22	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3413023	20 - 23	½	15	M8	55	39	23	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3413028	25 - 28	¾	20	M8	60	44	26	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3413035	31 - 35	1	25	M8	67	51	30	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3413039	36 - 39	-	-	M8	75	56	32	20 x 1,25	M6	600	-	50 *
3413043	40 - 43	1¼	32	M8	75	60	34	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3413045	44 - 45	-	-	M8	85	63	35	20 x 1,25	M6	800	-	50 *
3413053	48 - 51	1½	40	M8	85	66	37	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3413054	53 - 56	-	-	M8	89	72	40	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3413063	59 - 63	2	50	M8	94	78	43	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3403018	15 - 18	¾	10	M8/10	48	44	30	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3403023	20 - 23	½	15	M8/10	55	47	31	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3403028	25 - 28	¾	20	M8/10	60	52	34	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3403035	31 - 35	1	25	M8/10	67	59	38	20 x 1,00	M6	600	RAL <sup>2</sup>	50
3403043	40 - 43	1¼	32	M8/10	75	68	42	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3403053	48 - 51	1½	40	M8/10	85	74	45	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3403054	53 - 56	-	-	M8/10	89	80	48	20 x 1,25	M6	800	RAL <sup>2</sup>	50
3403063	59 - 63	2	50	M8/10	94	86	51	20 x 1,25	M6	800	RAL <sup>2</sup>	50

RAL<sup>2</sup> = testiran, sertifikovan i eksterno kontrolisan prema RAL-GZ 655/B i RAL-GZ 656.

\* Not included in the scope of European Technical Assessment ETA 22/0562.

Za detaljne tehničke informacije o našim proizvodima sa RAL sertifikatom, pogledajte RAL datasheet na našoj veb stranici.

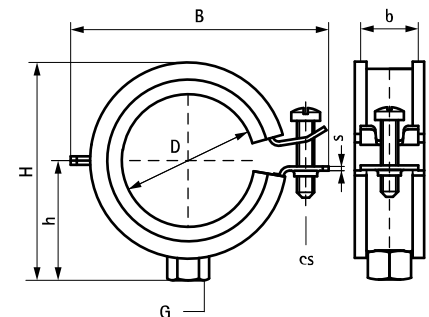

## Kompetabilno

Walraven RapidRail® Sistem za pričvršćivanje  
Walraven Dodatci za montažu  
Walraven Dodatci za pričvršćivanje

## Alternativa

BISMAT® Flash