


BISOFIX<sup>®</sup> E25 + Bifix<sup>®</sup> G2

(D 03 30)

za rashladne medije 12,0 - 160,0 mm

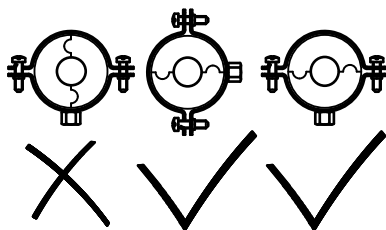

## Prednosti i osobine

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix<sup>®</sup> G2 clamp
- Bifix<sup>®</sup> G2 with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <80mm = 80kg/m<sup>3</sup>
- PIR density for D >80mm = 120kg/m<sup>3</sup>
- zaštita materijala:
  - proizvod je deo Walraven BIS UltraProtect<sup>®</sup> sistema
  - pogodan za unutrašnju i spoljašnju upotrebu
  - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- temperature range -45 °C - +105 °C

Art.br.	Consists Of	D (mm)	Model	F <sub>a,z</sub> (N)	KK
I253008012	I25000012 + 3008064	12,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	100	50
I253008015	I25000015 + 3008070	15,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	100	50
I253008018	I25000018 + 3008070	17,2 - 18,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	100	50
I253008022	I25000022 + 3008079	21,3 - 22,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	100	50
I253008028	I25000028 + 3008079	26,9 - 28,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	100	50
I253008035	I25000035 + 3008091	33,7 - 35,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	100	50
I253008042	I25000042 + 3008105	42,4	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	150	50
I253008048	I25000048 + 3008105	48,3	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	225	50
I253008054	I25000054 + 3008105	54,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	225	50
I253008057	I25000057 + 3008115	57,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	225	25
I253008060	I25000060 + 3008115	60,3	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	350	25
I253008064	I25000064 + 3008130	64,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	350	25
I253008070	I25000070 + 3008140	70,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	425	25
I253008076	I25000076 + 3008140	76,1	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	575	25
I253008089	I25000089 + 3008160	88,9	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	875	25
I253008102	I25000102 + 3008169	101,6	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	1.000	25
I253008108	I25000108 + 3008180	108,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	1.075	5
I253008114	I25000114 + 3008180	114,3	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	1.250	5
I253008133	I25000133 + 3008200	133,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	1.475	5
I253008140	I25000140 + 3008210	139,7	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	1.700	5
I253008160	I25000160 + 3008225	159,0 - 160,0	BISOFIX <sup>®</sup> E25 + Bifix <sup>®</sup> G2 Clamp	1.950	5