
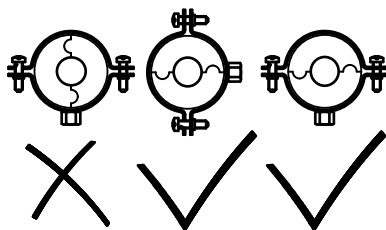


BISOFIX<sup>®</sup> PIR50 + Bifix<sup>®</sup> G2

(D 03 84)

za rashladne medije 12,0 - 114,3 mm



## Prednosti i osobine

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with Bifix<sup>®</sup> G2 clamp
- Bifix<sup>®</sup> G2 with M8/M10 connection nut
- ne sadrži FCKW, HFCKW, formaldehid ili kadmium supstance
- otpornost na požar klasa: B2
- PIR density for D <110mm = 80kg/m<sup>3</sup>
- PIR density for D >110mm = 120kg/m<sup>3</sup>
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- zaštita materijala:
  - proizvod je deo Walraven BIS UltraProtect<sup>®</sup> sistema
  - pogodan za unutrašnju i spoljašnju upotrebu
  - izdržava min. 1 000 sati sonog sprej testa (max. 5% crvene rdje) prema ISO standardu 9227
- temperature range -45 °C - +105 °C

Art.br.	Consists Of	D (mm)	Model	F <sub>a,z</sub> (N)	KK
I503008012	I500000012 + 3008115	12,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	220	25
I503008015	I500000015 + 3008115	15,0 - 16,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	250	25
I503008018	I500000018 + 3008115	17,2 - 18,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	300	25
I503008022	I500000022 + 3008130	21,3 - 22,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	340	25
I503008028	I500000028 + 3008130	26,9 - 28,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	350	25
I503008034	I500000034 + 3008140	33,7 - 35,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	370	25
I503008042	I500000042 + 3008140	42,4	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	470	25
I503008048	I500000048 + 3008140	48,3	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	500	15
I503008057	I500000057 + 3008160	56,0 - 57,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	520	15
I503008060	I500000060 + 3008160	60,3	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	540	15
I503008064	I500000064 + 3008169	64,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	550	15
I503008070	I500000070 + 3008169	70,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	600	15
I503008076	I500000076 + 3008180	76,1	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	650	15
I503008089	I500000089 + 3008200	88,9	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	690	15
I503008102	I500000102 + 3008200	101,6	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	720	15
I503008108	I500000108 + 3008210	108,0	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	760	15
I503008114	I500000114 + 3008210	114,3	BISOFIX <sup>®</sup> PIR50 + Bifix <sup>®</sup> G2 Clamp	1.680	15