


Walraven Gängpinnar

montage på skenor, väggplattor etc.

(K 55 05)

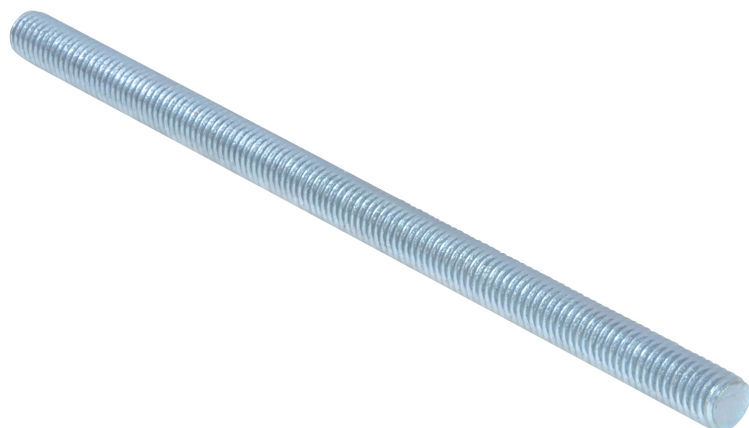


Funktioner och Fördelar

- enligt DIN 976-1
- material: stål, styrka klass 4.8
- blankförzinkad
- brandsäkerhetstestad

Art.nr.	RSK nr	BVB	Typ	G	L	$A_{s,nom}$ (mm ²)	$F_{a,z}$ (N)	fp	St.fp
6313802	3820998	123398	DIN 976-1	M8	25 mm	36,6	9 700	100	1 000
6313803	3821263	123398	DIN 976-1	M8	30 mm	36,6	9 700	100	1 000
6313804	3820999	123398	DIN 976-1	M8	40 mm	36,6	9 700	100	1 000
6313805	3821015	123398	DIN 976-1	M8	50 mm	36,6	9 700	100	1 000
6313806	3821000	123398	DIN 976-1	M8	60 mm	36,6	9 700	100	1 000
6313807	3805903	123398	DIN 976-1	M8	70 mm	36,6	9 700	100	1 000
6313808	3821001	123398	DIN 976-1	M8	80 mm	36,6	9 700	100	500
6313809	3820989	123398	DIN 976-1	M8	90 mm	36,6	9 700	100	500
6313810	3821002	123398	DIN 976-1	M8	100 mm	36,6	9 700	100	500
6313812	3821003	123398	DIN 976-1	M8	120 mm	36,6	9 700	50	250
6313815	3821004	123398	DIN 976-1	M8	150 mm	36,6	9 700	50	250
6313818	3821016	123398	DIN 976-1	M8	180 mm	36,6	9 700	50	250
6313820	3821029	123398	DIN 976-1	M8	200 mm	36,6	9 700	50	250
6323002	3821221	123398	DIN 976-1	M10	25 mm	58,0	15 400	50	500
6323004	3821222	123398	DIN 976-1	M10	40 mm	58,0	15 400	50	500
6323005	3821223	123398	DIN 976-1	M10	50 mm	58,0	15 400	50	500
6323006	3821224	123398	DIN 976-1	M10	60 mm	58,0	15 400	50	500
6323007	3821005	123398	DIN 976-1	M10	70 mm	58,0	15 400	50	500
6323008	3821060	123398	DIN 976-1	M10	80 mm	58,0	15 400	50	500
6323009	3821264	123398	DIN 976-1	M10	90 mm	58,0	15 400	50	500
6323010	3821006	123398	DIN 976-1	M10	100 mm	58,0	15 400	50	250
6323012	3805904	123398	DIN 976-1	M10	120 mm	58,0	15 400	50	-
6323015	3821017	123398	DIN 976-1	M10	150 mm	-	-	50	250
6323016	3821007	123398	DIN 976-1	M10	160 mm	58,0	15 400	50	250
6323018	3821018	123398	DIN 976-1	M10	180 mm	58,0	15 400	50	250
6323020	3821019	123398	DIN 976-1	M10	200 mm	58,0	15 400	50	250

M10 och ovan har testats för brandsäkerhet.

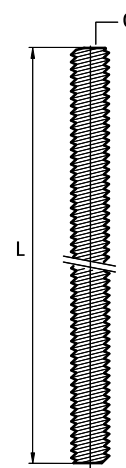

Kompletterande

Walraven Långmutter / Skarvmutter
Walraven Justerbar gängstångsskarv